

Open air

by ALUMINCO



Ground fixing guide

ELEGANT.INNOVATIVE.UNIQUE

Ground fixing guide	1
Ground fixing guide	7
Alternative ground fixing with galvanized fixing base	15
Alternative ground fixing with concrete screw	21
Corner ground fixing guide	27
Ground fixing with secret screw	33
Ground fixing guide for fixed typology	41
Ground fixing guide for fixed typology - Installation with slope +/-10°	45

INSTALLATION METHODS

1



Inox allen screw M10x70

Code **EB912-1070**

Expansion plug

Code **EB01M-1040**

2



Galvanized fixing base

Code **E2200-173**

3



Concrete Screw Ø12-110

Code **EBM-12110**

4



Concrete Torx Ø7.5x112

Code **EBM-75112G**

5



Concrete Allen Screw Ø10x120





Code **EBM-10120G**

For proper function of OPEN AIR units, the installation must be only on concrete or tiled floors.

IMPORTANT NOTE:

- The ground must be 100% level.
- It is not recommended to install on wooden or metal floors.

REQUIRED TOOLS









Open air

by ALUMINCO






Ground fixing guide

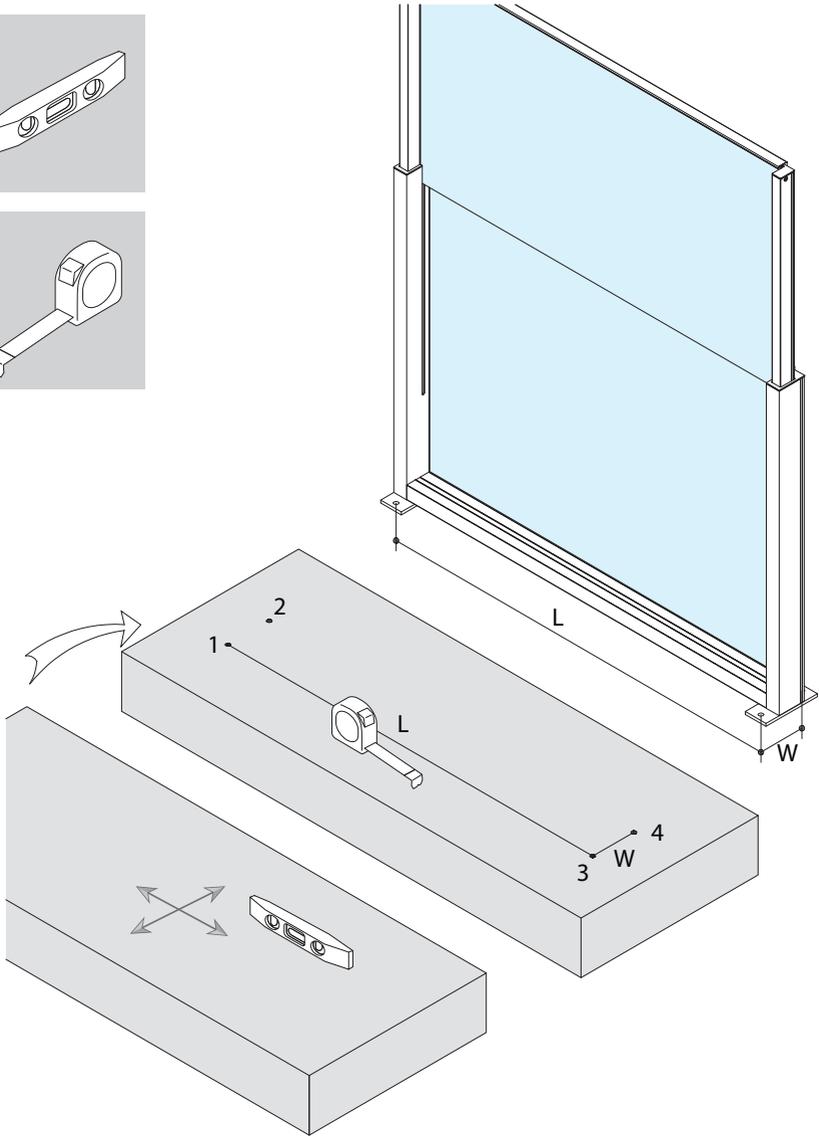

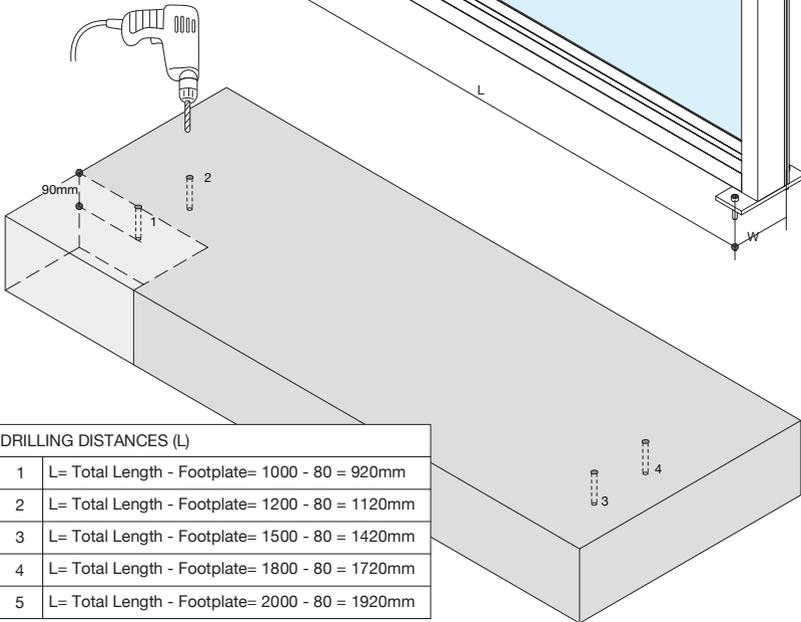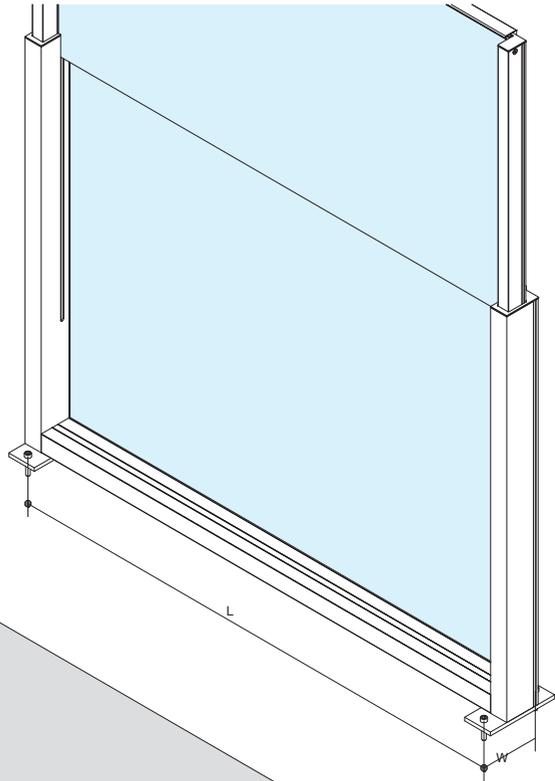

DRILLING DISTANCES (L)	
1	L= Total Length - Footplate= 1000 - 80 = 920mm
2	L= Total Length - Footplate= 1200 - 80 = 1120mm
3	L= Total Length - Footplate= 1500 - 80 = 1420mm
4	L= Total Length - Footplate= 1800 - 80 = 1720mm
5	L= Total Length - Footplate= 2000 - 80 = 1920mm

Ground fixing guide

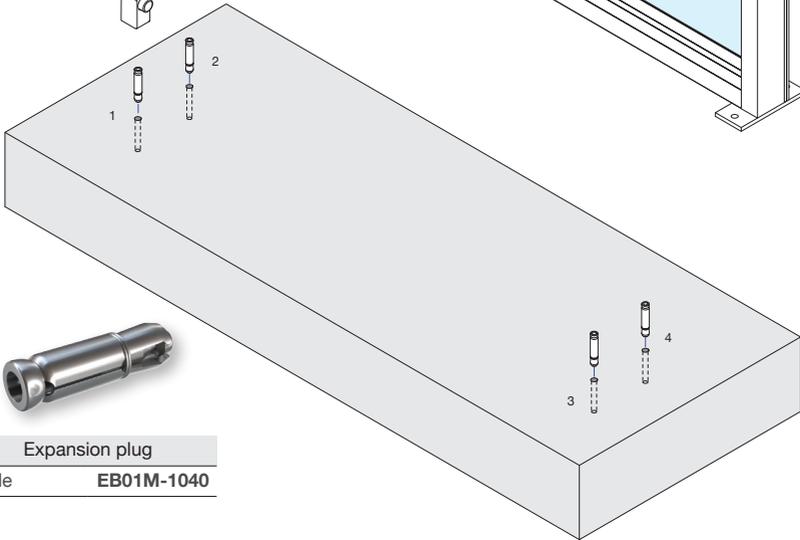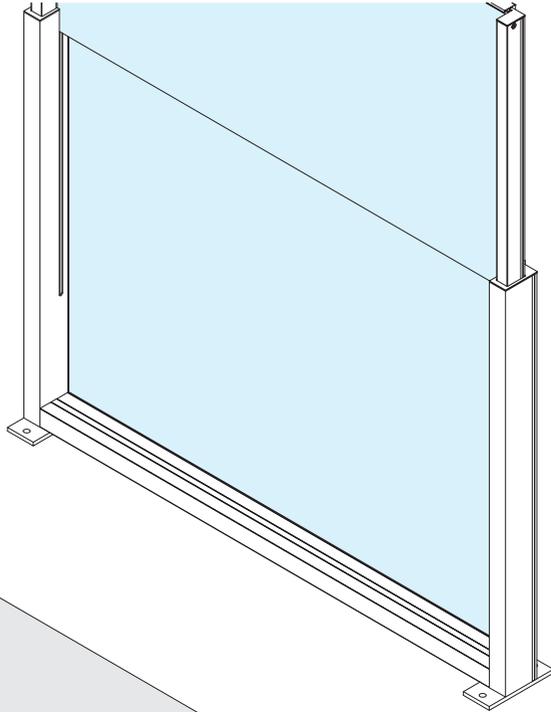



Expansion plug


Code **EB01M-1040**



Inox allen screw M10x70
Code **EB912-1070**

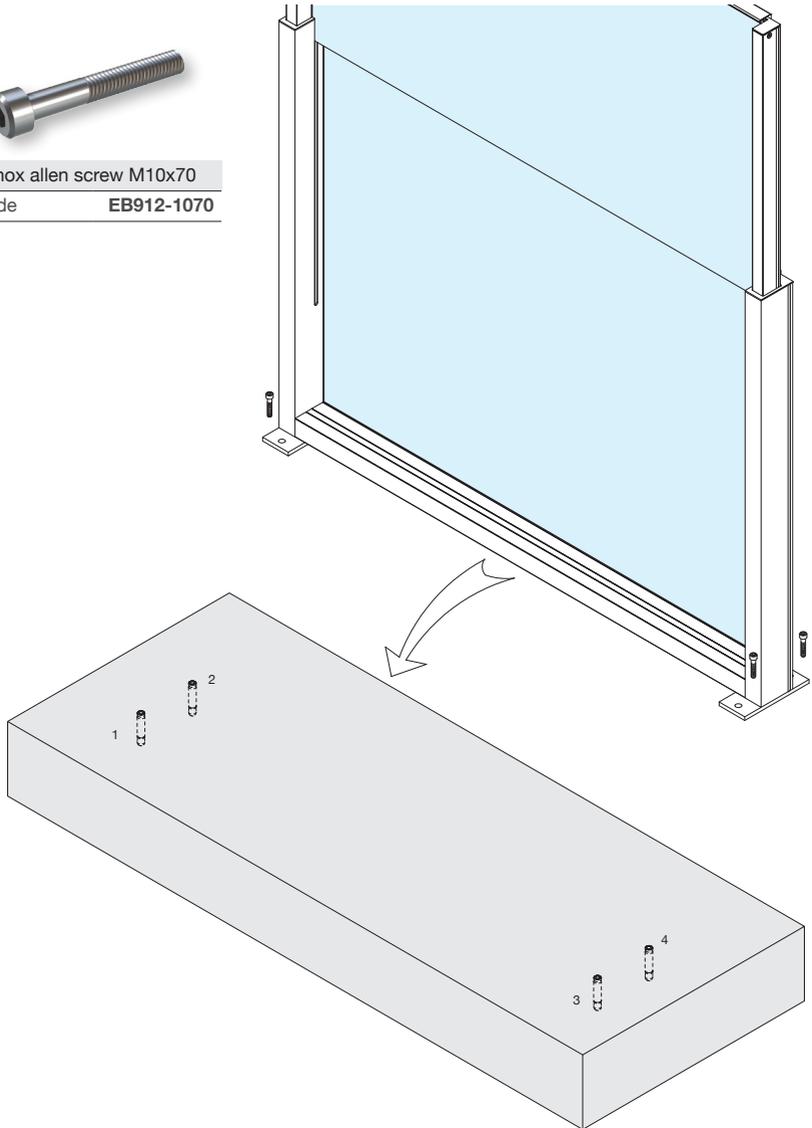

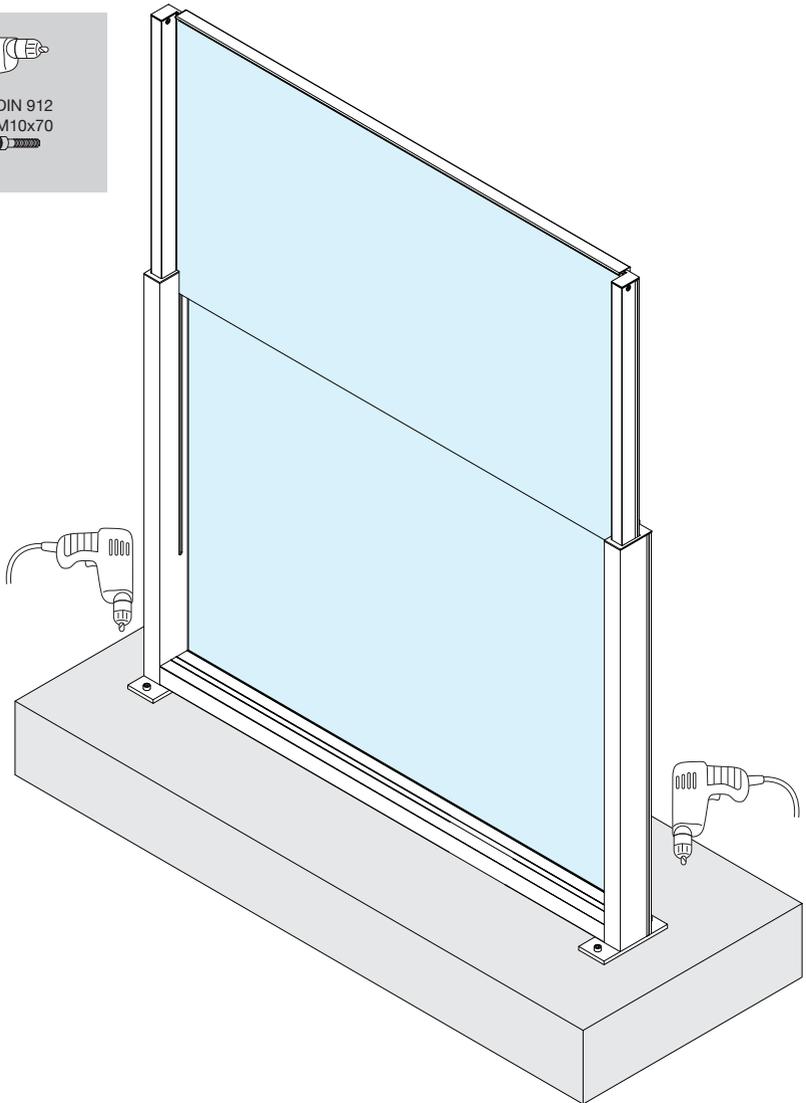

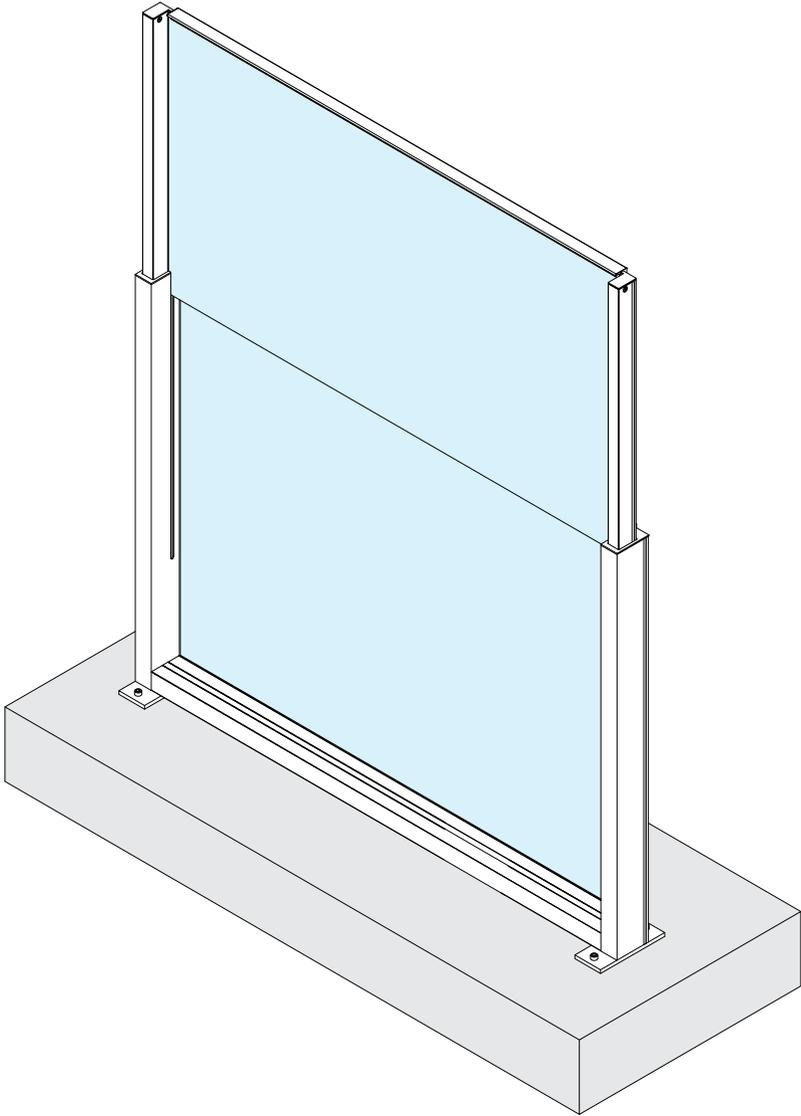

Open air

by ALUMINCO












Alternative ground fixing with
galvanized fixing base

Alternative ground fixing with galvanized fixing base





Galvanized fixing base	
Code	E2200-173

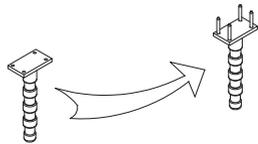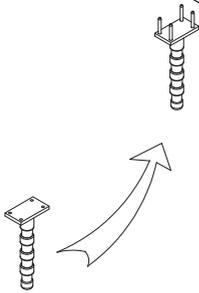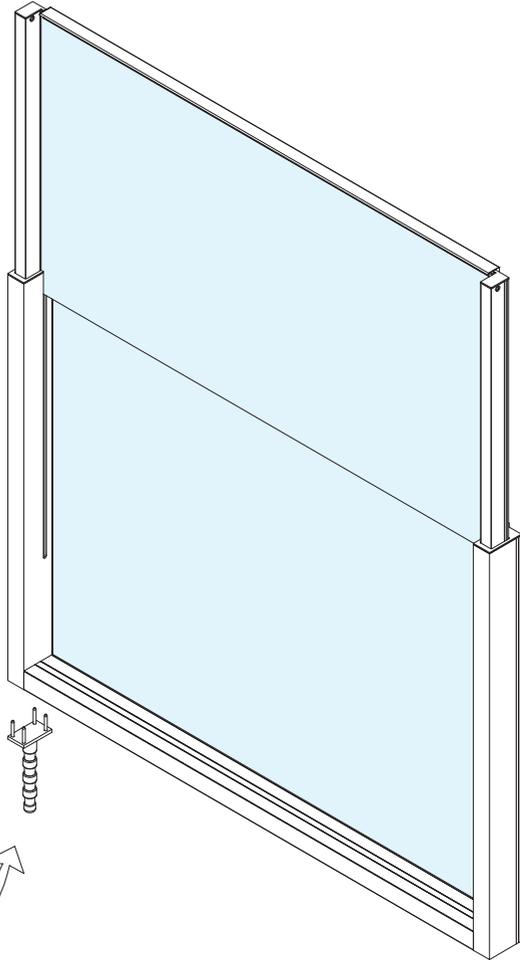

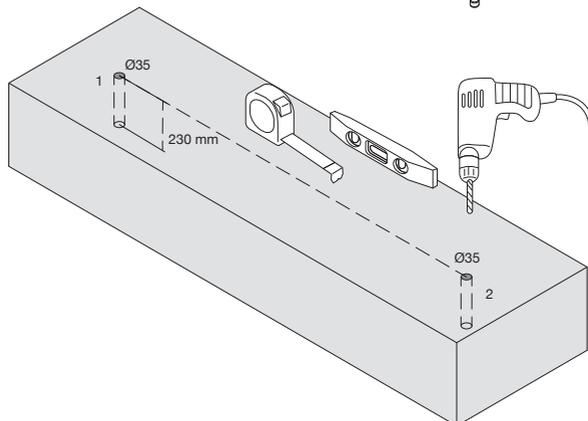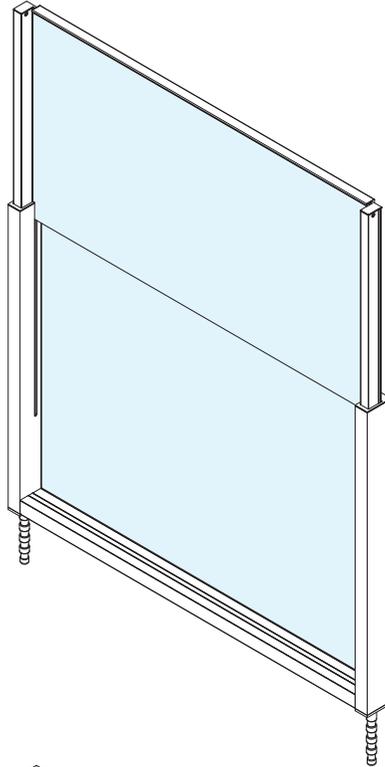

Alternative ground fixing with galvanized fixing base

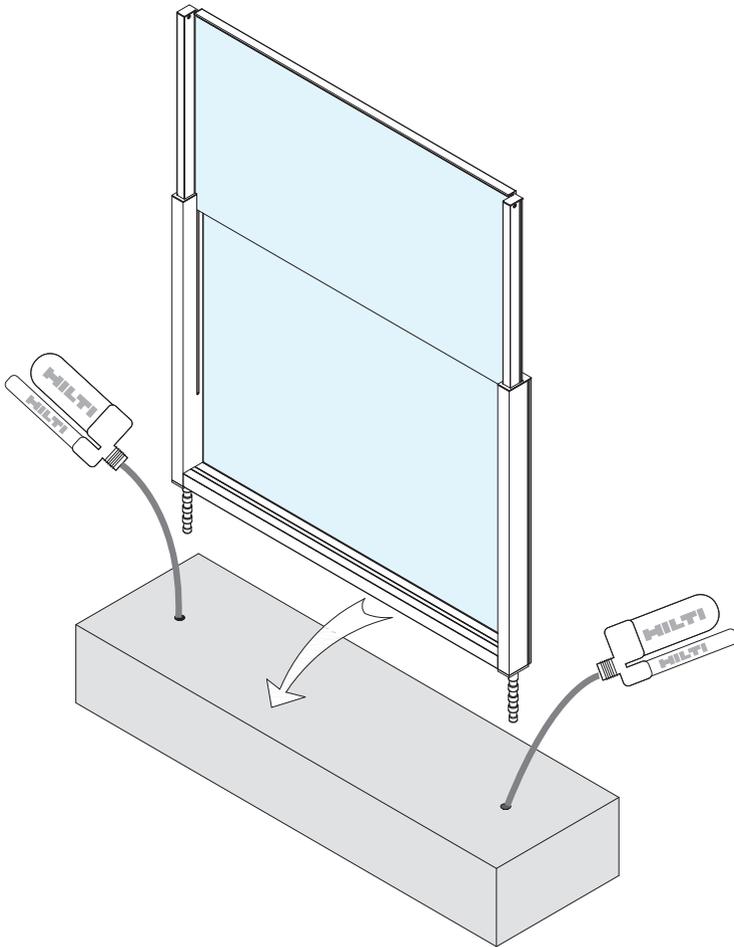

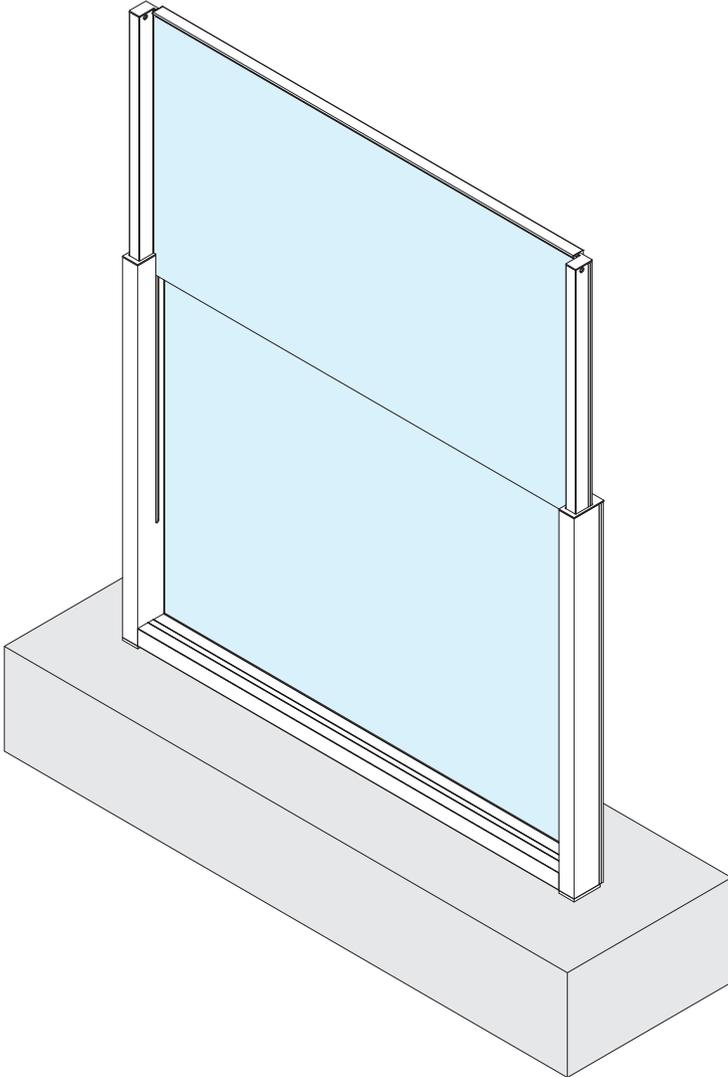



Open air

by ALUMINCO



Alternative ground fixing
with concrete screw



Alternative ground fixing with concrete screw

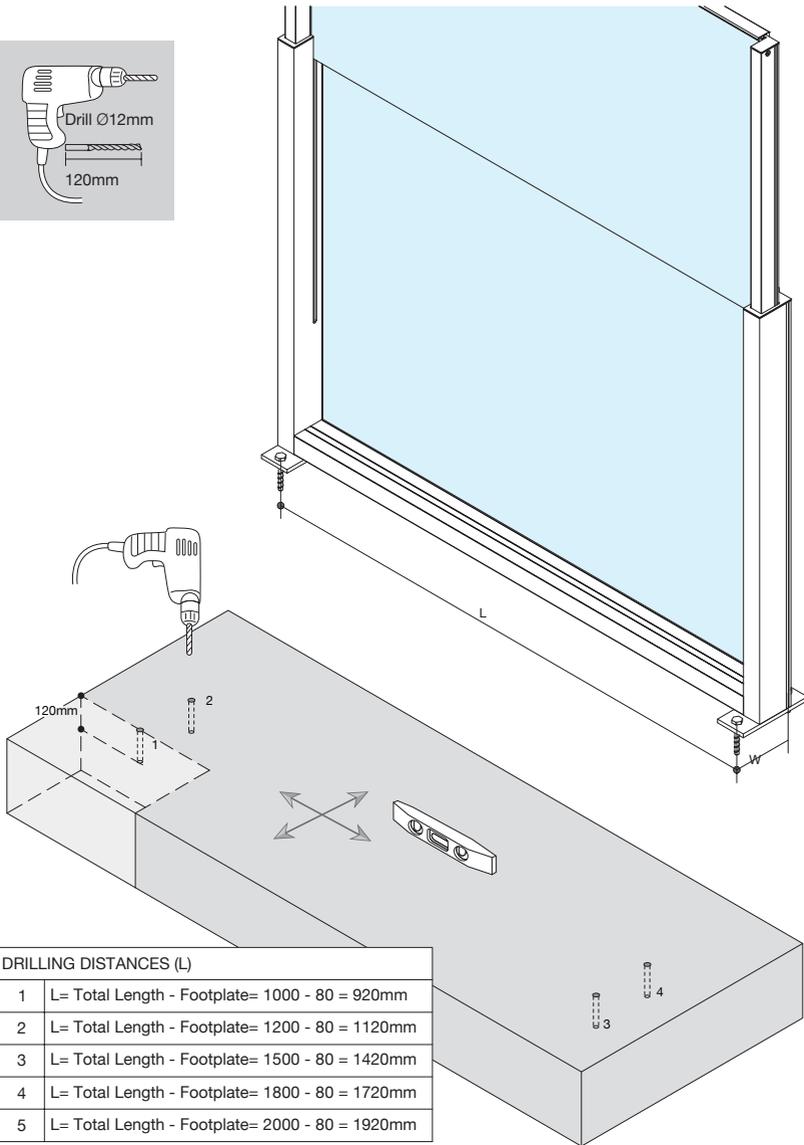






Concrete Screw Ø12-110

Code **EBM12-110**

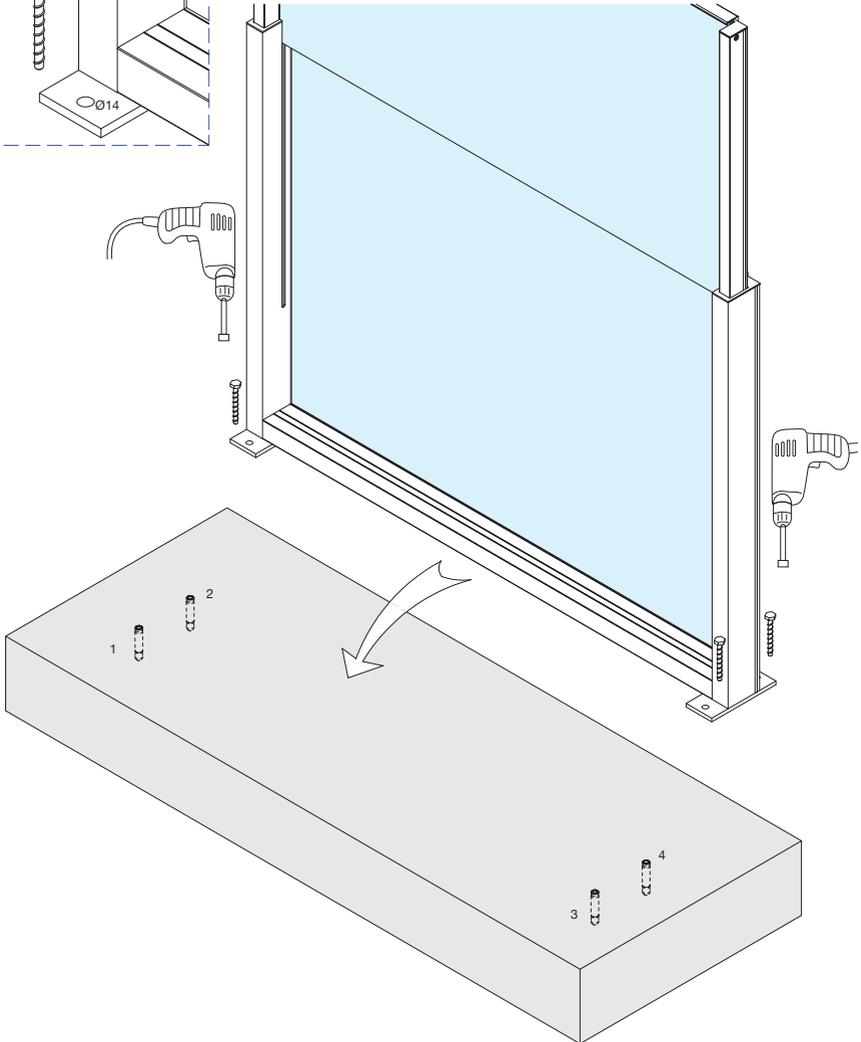

Alternative ground fixing with concrete screw

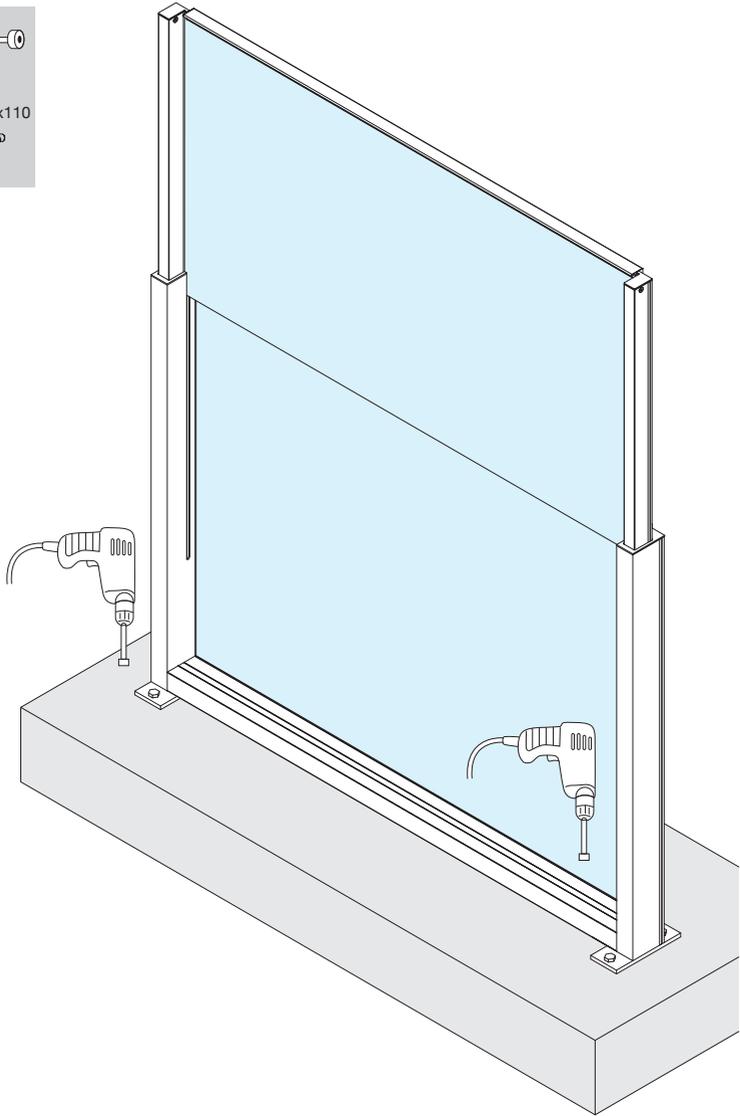

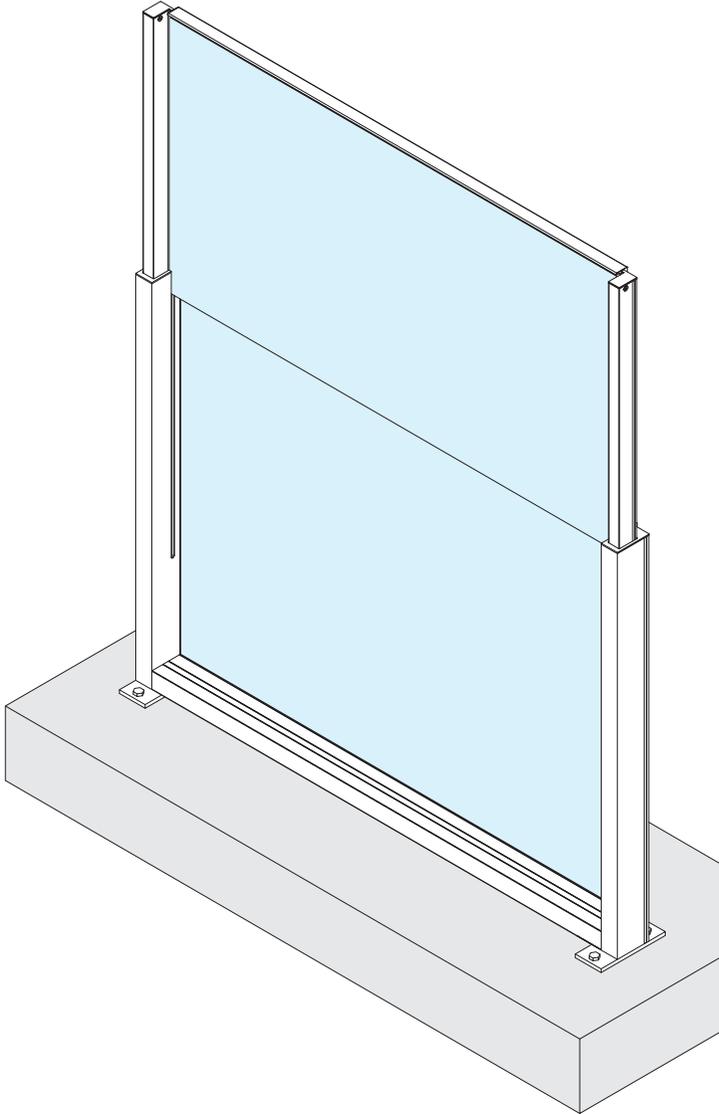





Open air

by ALUMINCO



Corner ground fixing guide



Corner ground fixing guide

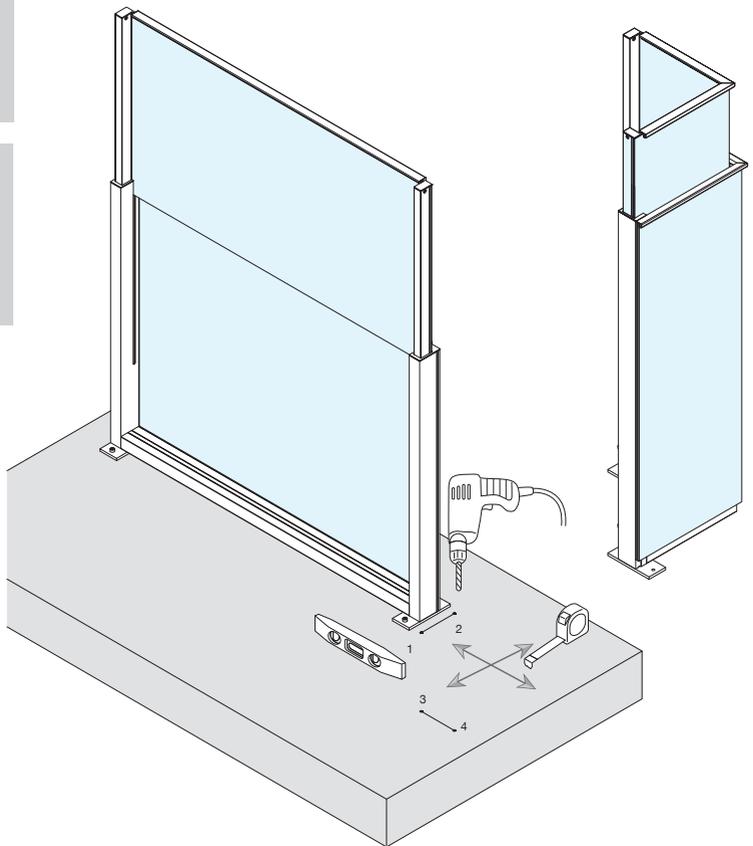





Expansion plug


Code **EB01M-1040**

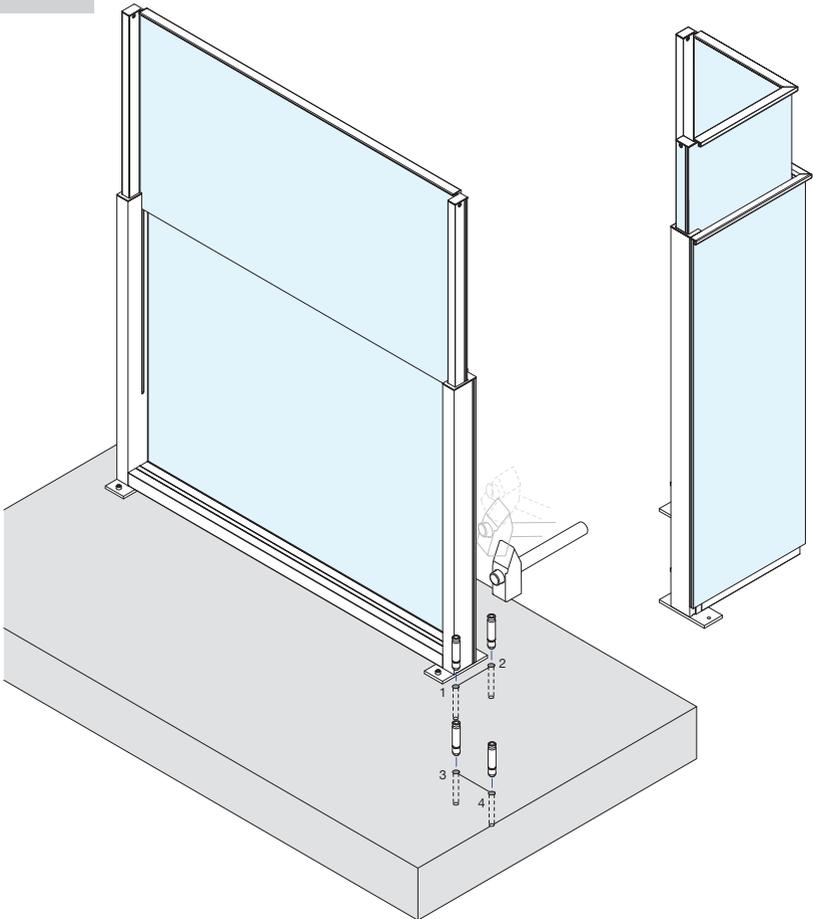

Corner ground fixing guide

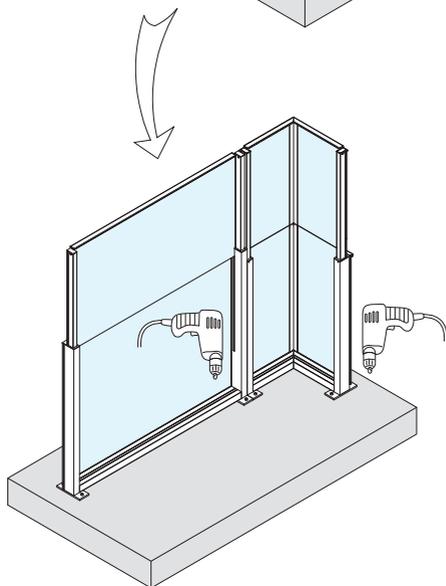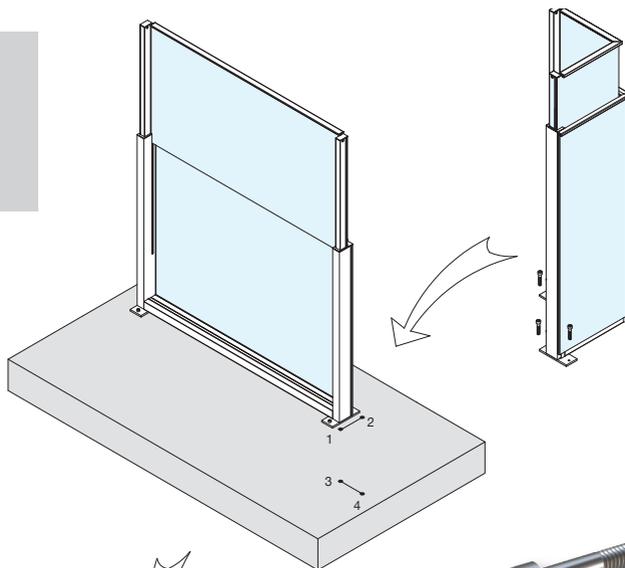

Inco allen screw M10x70
Code **EB912-1070**

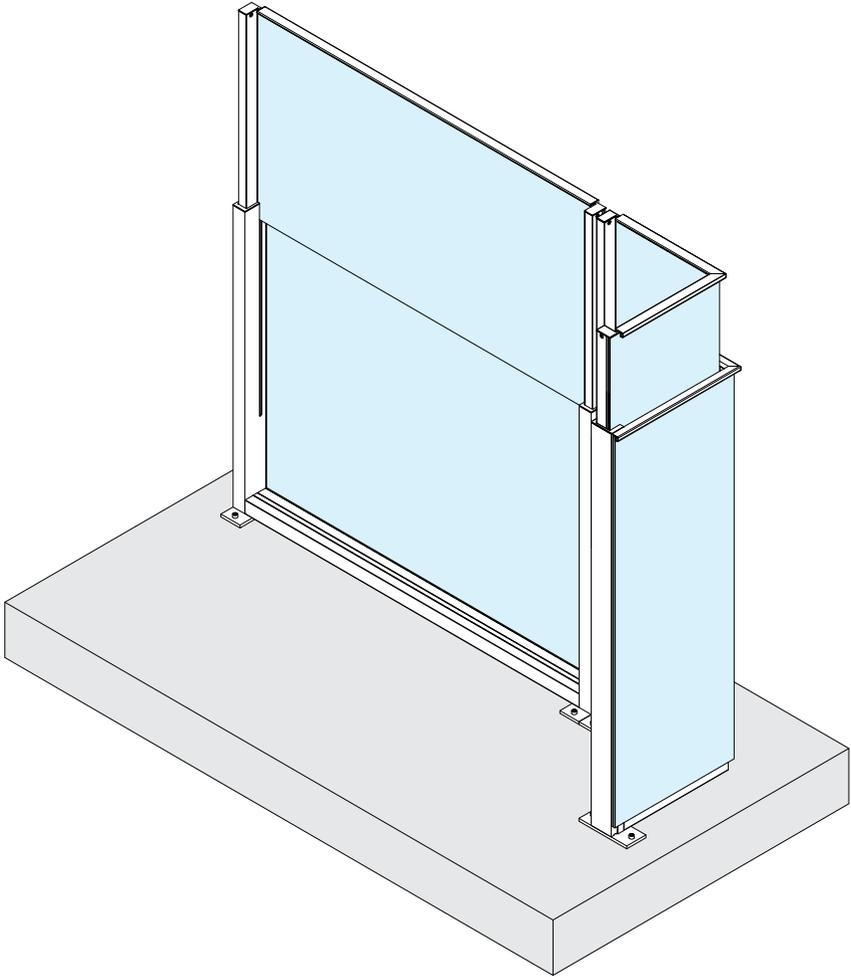


Open air


by ALUMINCO



Ground fixing with secret screw

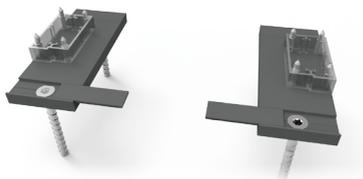


Ground fixing with secret screw



ΑΠΟΣΤΑΣΕΙΣ ΤΡΥΠΗΜΑΤΟΣ / DRILLING DISTANCES (L)



1	L= O.A. Total Length - Footplate= 1000 - 80 = 920mm
2	L= O.A. Total Length - Footplate= 1200 - 80 = 1120mm
3	L= O.A. Total Length - Footplate= 1500 - 80 = 1420mm
4	L= O.A. Total Length - Footplate= 1800 - 80 = 1720mm
5	L= O.A. Total Length - Footplate= 2000 - 80 = 1920mm

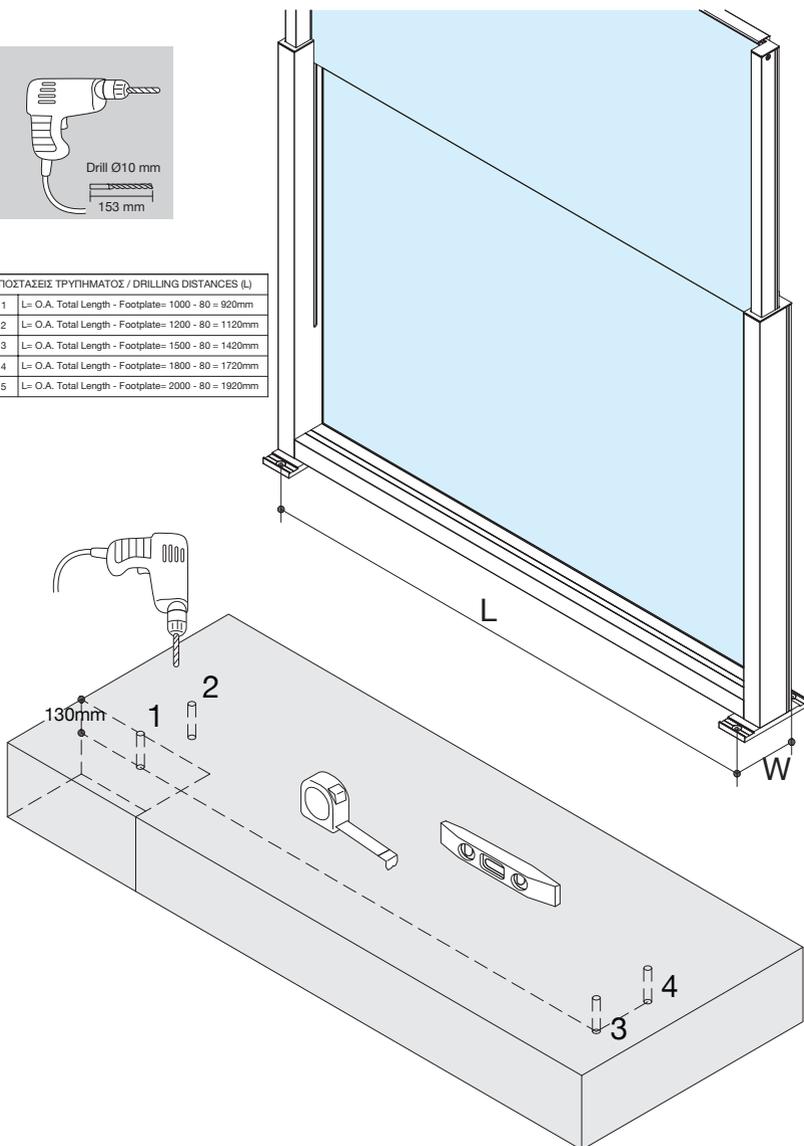





Concrete Allen Screw Ø10x120

Code **EBM-10120G**

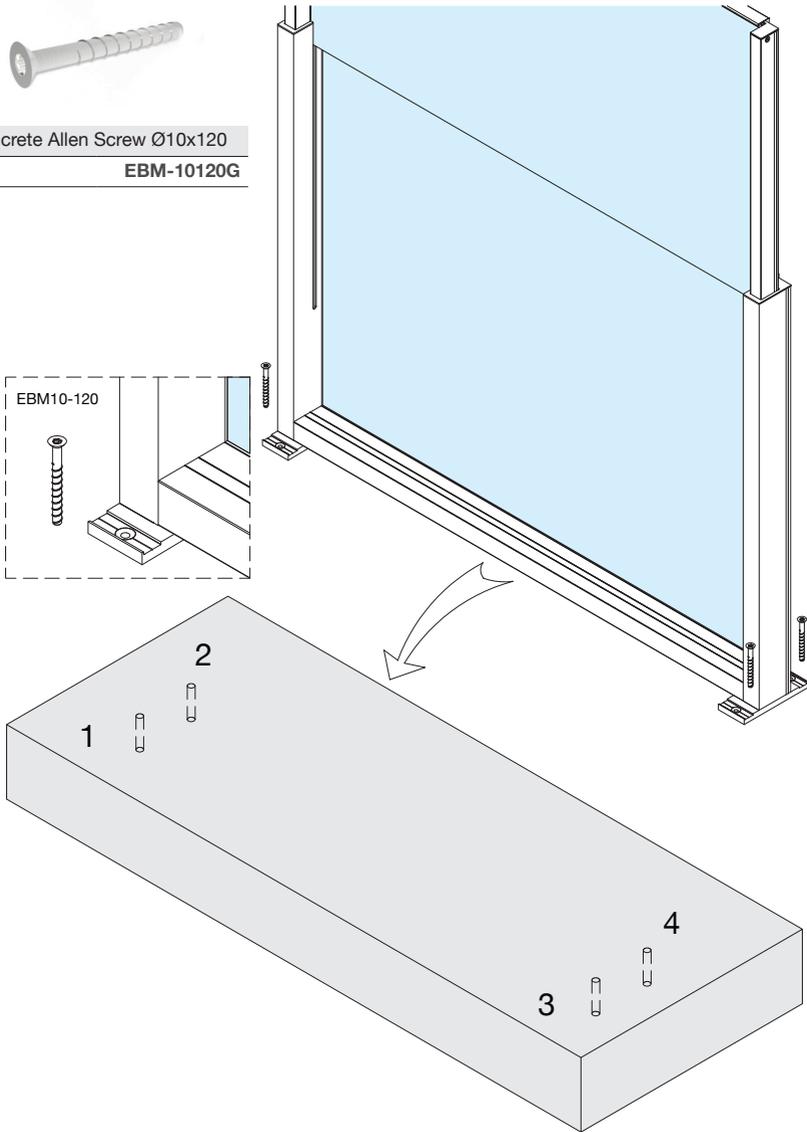



Ground fixing with secret screw

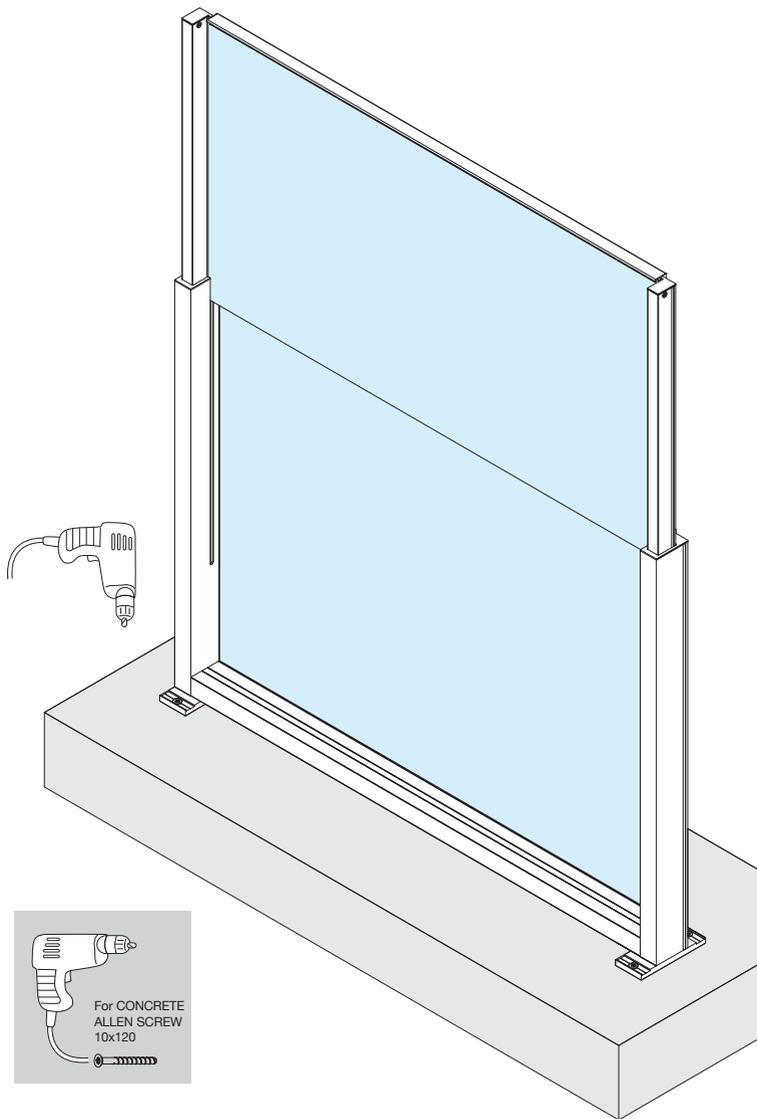

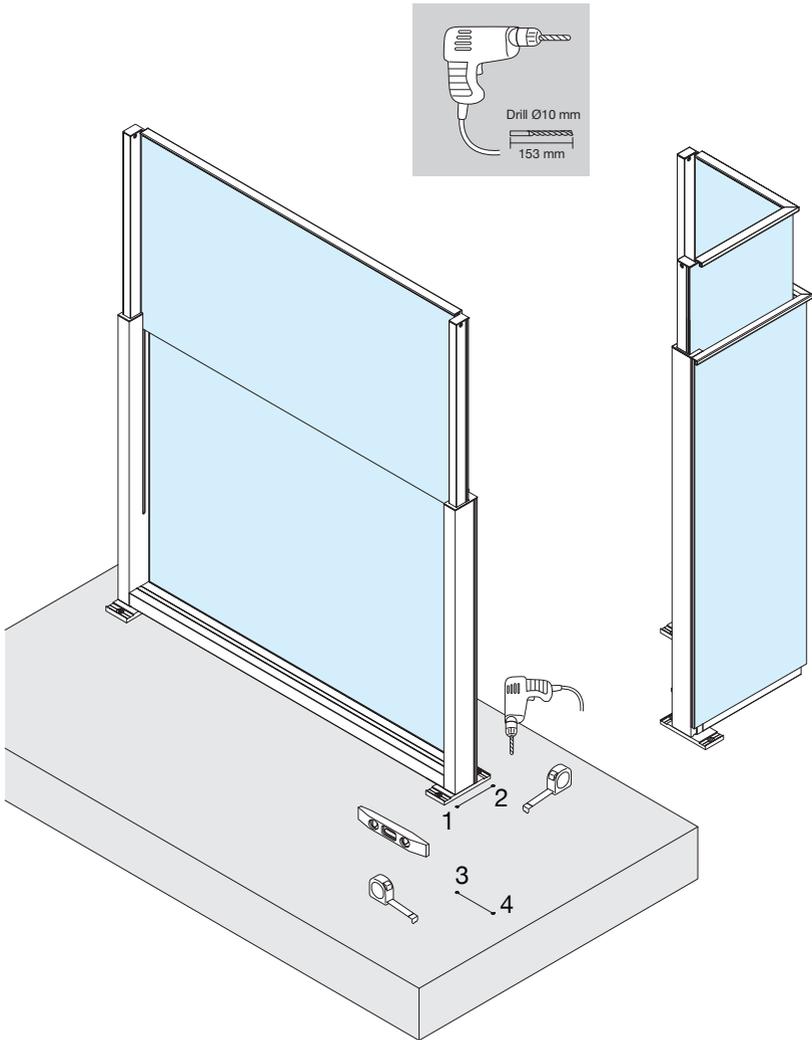

Ground fixing with secret screw

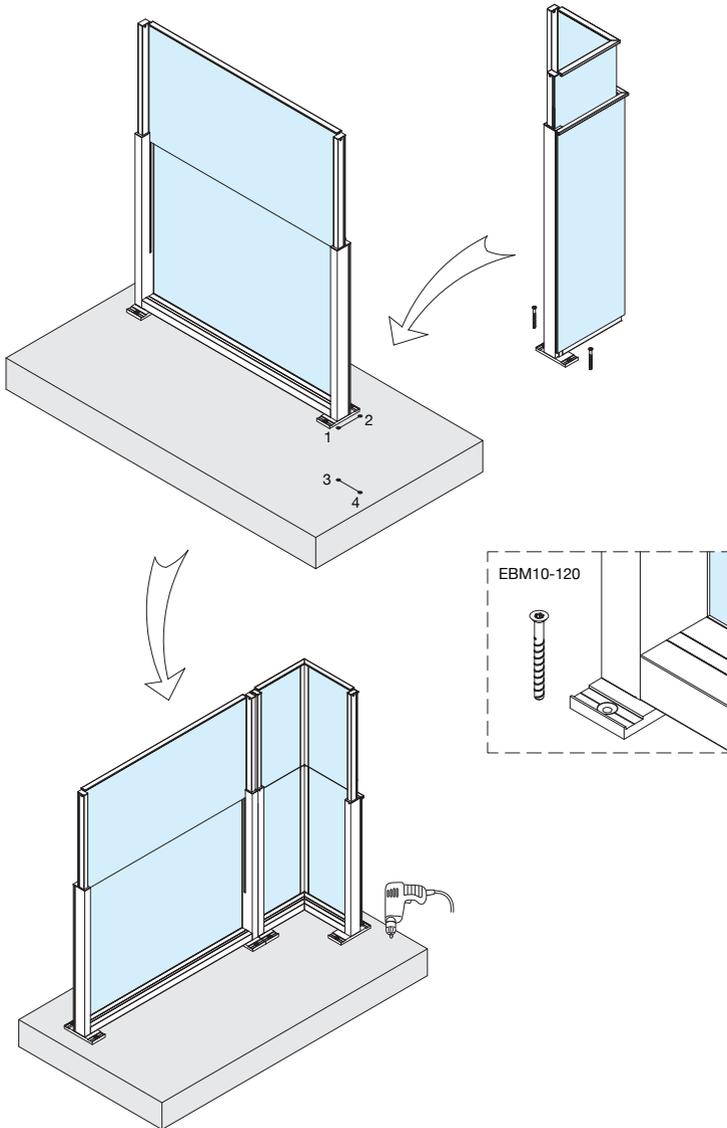





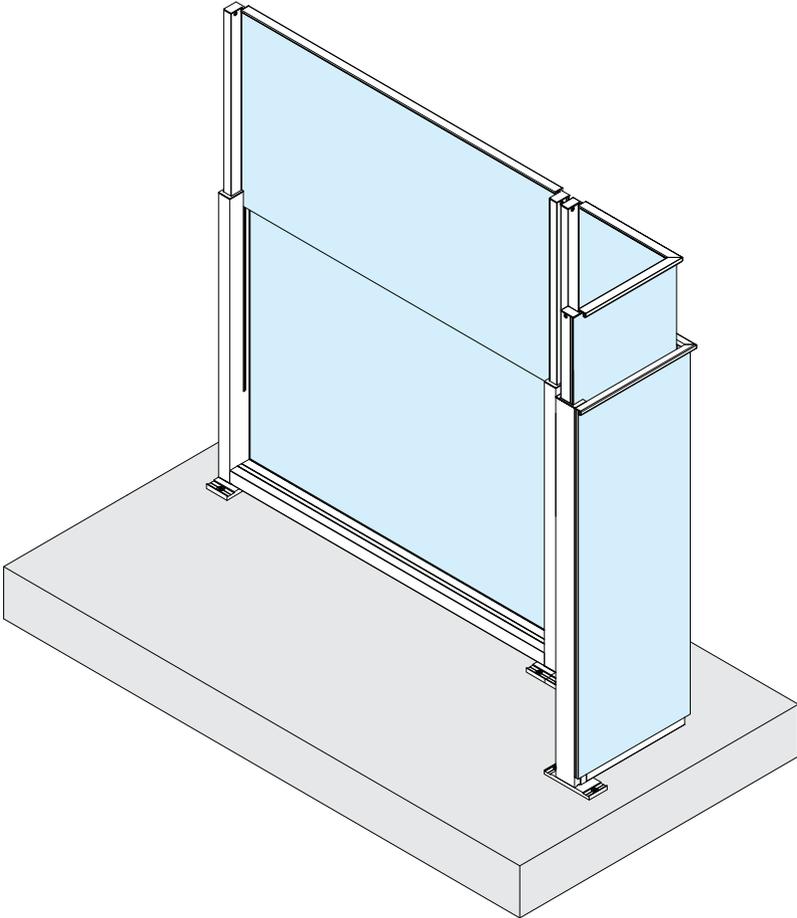


Open air




Ground fixing guide for
fixed typology

Ground fixing guide for fixed typology

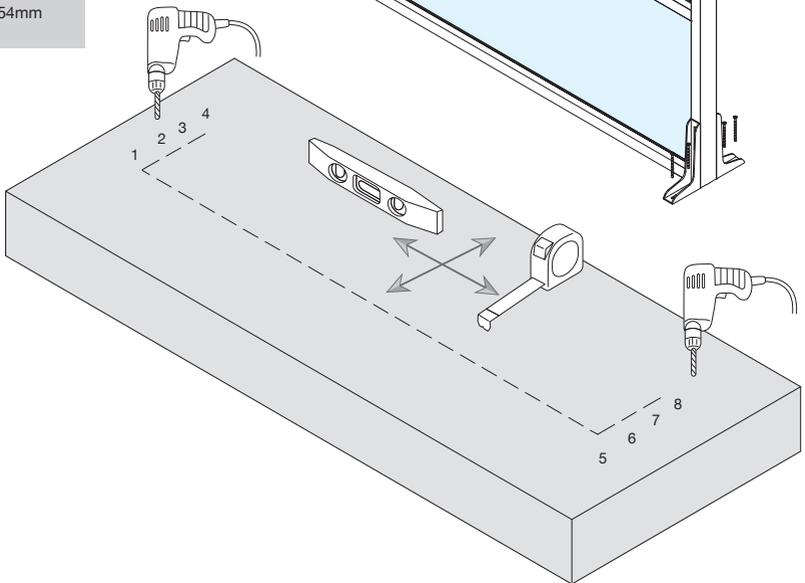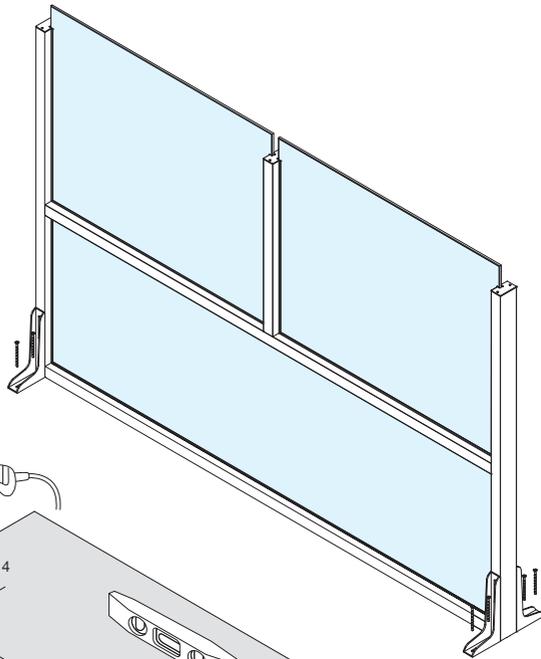



Concrete Torx 7.5x112
Code EBM-75112G






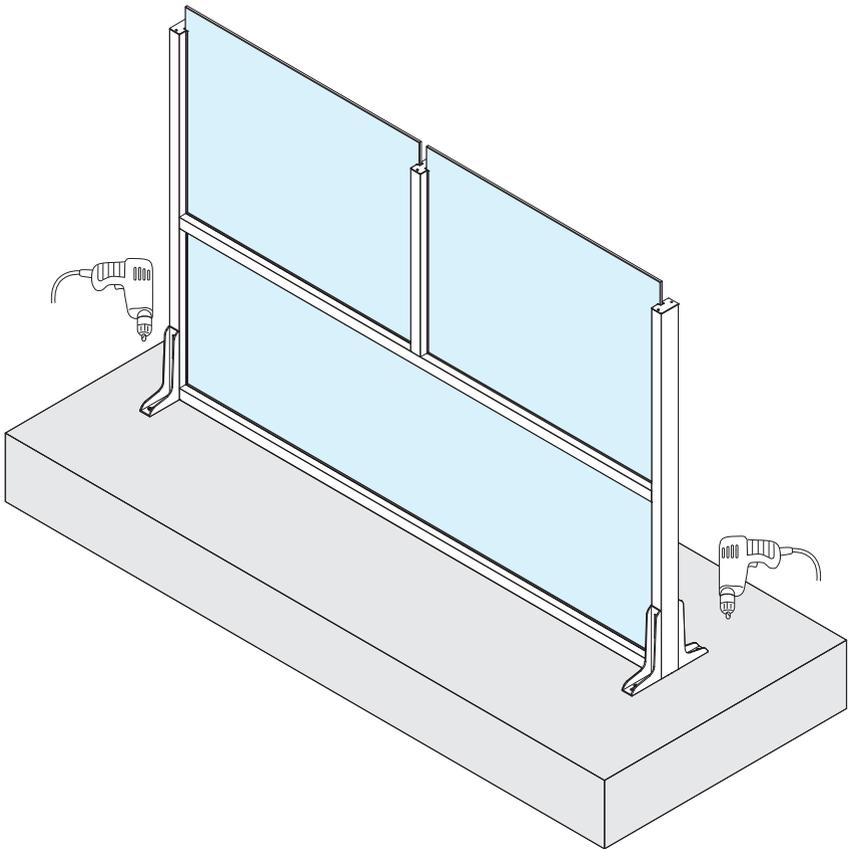


Open air



Ground fixing guide for fixed
typology - Installation with slope
 $\pm 10^\circ$


Ground fixing guide for fixed typology - Installation with slope $\pm 10^\circ$

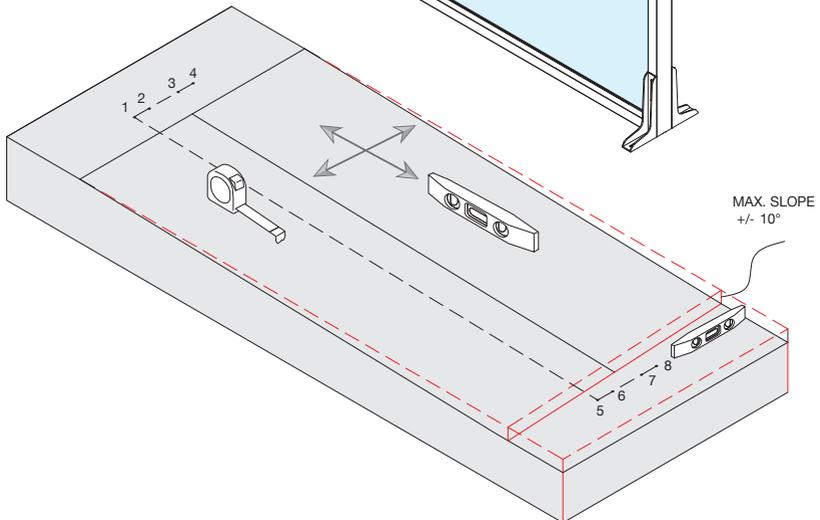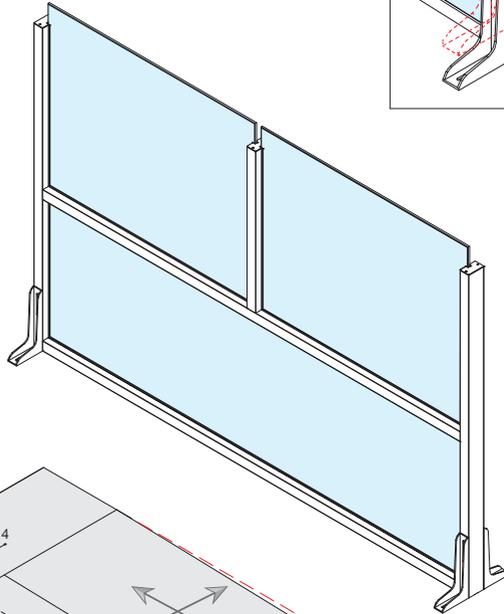


Ground fixing guide for fixed typology - Installation with slope +/-10°



Concrete Torx 7.5x112
Code **EBM-75112G**

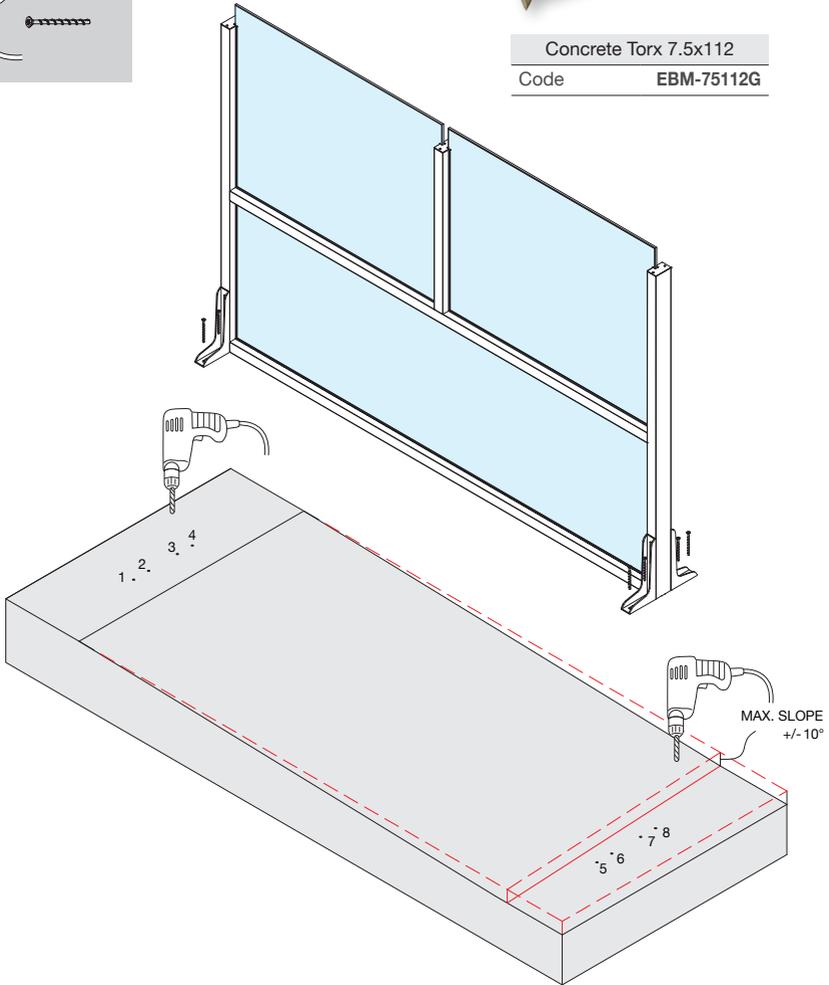

Ground fixing guide for fixed typology - Installation with slope +/-10°

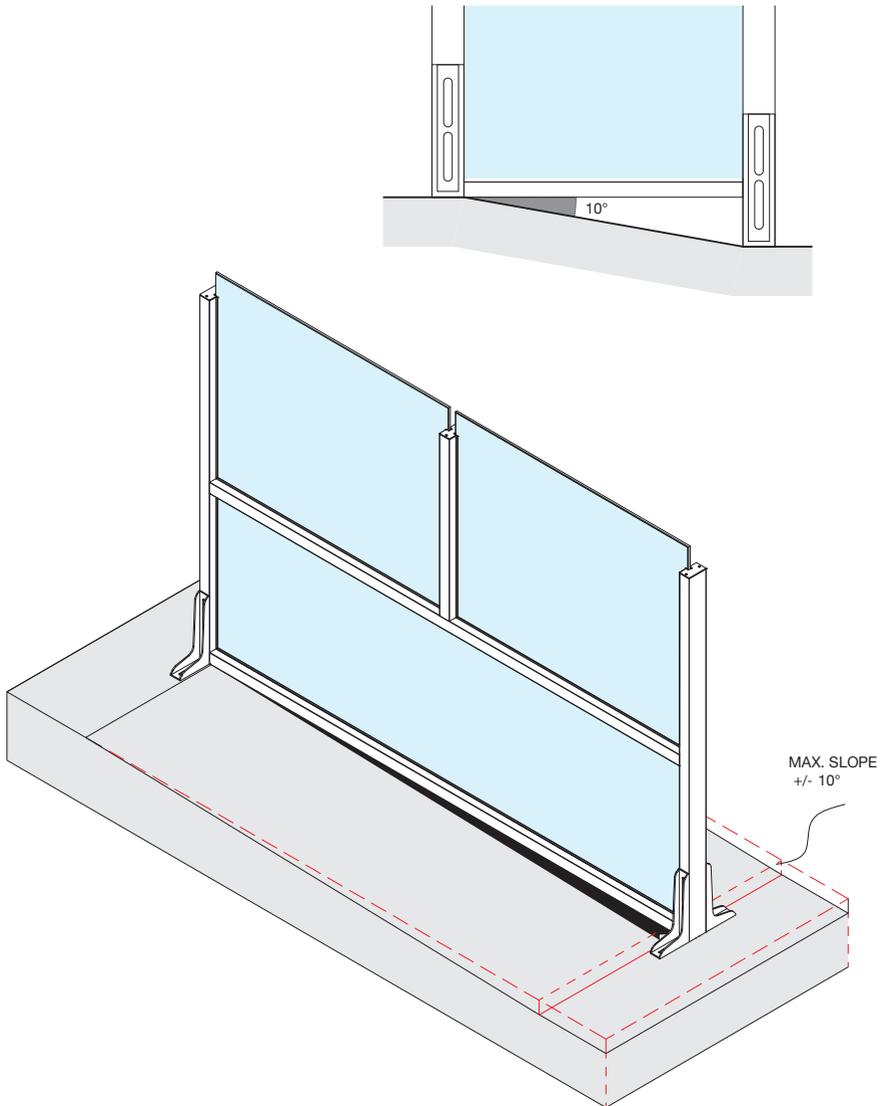

ALUMINCO